


NLS-HR21

Hand-held Barcode Scanner

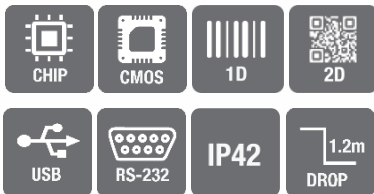

Features

■ Cost-effective Solution

The NLS-HR21 provides a cost-effective data capture solution that allows customers to enjoy the capabilities of 2D barcode scanner for the price of 1D scanner.

■ Elegant Appearance

Blending ergonomics and aesthetics in its design, the NLS-HR21 not only ensures operator comfort and productivity for intensive hand-held scanning but also meets the aesthetic needs of the O2O era.

■ Enhanced Performance

Equipped with Newland's third-generation decoder chip, the NLS-HR21 can effortlessly capture high-density, high-volume and distorted barcodes printed on paper or displayed on screen.

■ Durable Construction

The NLS-HR21, built into an IP42-sealed and drop resistant (1.2m) housing with no moving parts, fortifies itself inside and out.

Application Scenarios

O2O (Online to Offline) payments, O2O gift card/e-voucher consumption check, purchase-sales-inventory management, ticket/voucher management, office automation.

NLS-HR21

SCANNING MADE SIMPLE

Hand-held Barcode Scanner

| | | | | |
|-----------------------------------|-------------------------|-----------|---|--|
| Performance | Image Sensor | | 640×480 CMOS | |
| | Illumination | | White LED | |
| | Aiming | | 625nm red LED | |
| | Symbologies | 2D | | PDF417, QR Code, Data Matrix, Chinese Sensible Code |
| | | 1D | | Code128, UCC/EAN-128, AIM 128, EAN-8, EAN-13, ISBN/ISSN, UPC-E, UPC-A, Interleaved 2 of 5, ITF-6, ITF-4, Matrix 2 of 5, Industrial 25, Standard 25, Code39, Codabar, Code 93, Code 11, Plessey, MSI-Plessey, RSS-14, RSS-Limited, RSS-Expand |
| | Resolution* | | ≥4mil | |
| | Typical Depth of Field* | EAN-13 | | 55mm-220mm (13mil) |
| | | QR Code | | 35mm-110mm (15mil) |
| | Scan Angle** | Pitch | | ±45° |
| | | Roll | | 360° |
| | | Skew | | ±40° |
| | Field of View | | | Horizontal 45°, Vertical 34° |
| Symbol Contrast* | | | ≥30% | |
| Mechanical/ Electrical | Interfaces | | USB (Standard), RS-232(Optional) | |
| | Dimensions | | 101(L)×68(W)×145(H)mm | |
| | Weight | | 115g | |
| | Notification | | Beep, LED indicator | |
| | Rated Power Consumption | | 0.31W (typical) | |
| | Operating Voltage | | 5VDC±10% | |
| | Current@5VDC | Operating | | 62mA (typical), 115.5mA (max.) |
| | | Standby | | 33mA |
| Environmental | Operating Temperature | | -20°C to 50°C (-4°F to 122°F) | |
| | Storage Temperature | | -40°C to 70°C (-40°F to 158°F) | |
| | Humidity | | 5%~95% (non-condensing) | |
| | ESD | | ±8 KV (contact discharge); ±15 KV (air discharge) | |
| | Drop | | 1.2m | |
| | Sealing | | IP42 | |
| Certifications | | | FCC Part15 Class B , CE EMC Class B | |
| Accessories | Cable | USB | Used to connect and power the HR21 with a host device. | |
| | | RS-232 | Used to connect the HR21 to a host device. (Optional) | |
| | Power Adapter | | DC5V adapter, used to power the HR21 with RS-232 cable. | |

*Test conditions: T=23°C; Illumination=300lux using incandescent lamp; sample barcodes made by Newland.

**Test conditions: Scan Distance=(min. DOF + max. DOF)/2; T=23°C; Illumination=300lux using incandescent lamp;

2D: QR Code; 10 Bytes; Resolution=15mil; PCS=0.8.

Specifications are subject to change without notice.

Version:

Newland China
+86-591-83978605
marketing@nlscan.com
www.newlandaidc.com

Newland Europe
+31(0)-345-87-0033
info@newland-id.com
www.newland-id.com

Newland North America
+1-510-490-3888
info@newlandna.com
www.newlandamerica.com

Newland Latin America
+1-239-598-0068
info@newlandla.com
www.newlandamerica.com

Newland Taiwan
+886-2-7731-5388
info@newland-id.com.tw
www.newland-id.com.tw

Newland Korea
+82-10-8990-4838
th.sung@newland-id.com.tw
www.newlandaidc.com

